




内蒙古精诚高压绝缘子有限责任公司

Inner Mongolia Jingcheng High Voltage Insulator Co.,Ltd.

直流防污型（钟罩型）

DC Anti-Pollution Type (Fog Type)

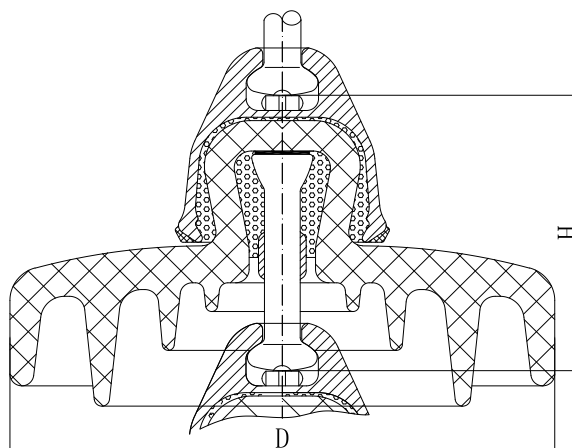

IEC Designation		U160BLP	U210BP	U300BP
绝缘子代号 Code of Insulator		UD160B170/560H20R	UD210B170/560H20R	UD300B195/560H24R
产品型号 Type		XZP—160	XZP—210	XZP—300
额定机电破坏负荷 (kN) Rated E&M Failing Load		160	210	300
逐个拉伸负荷 (kN) Mechanical Routine Test Load		80	105	150
公称盘径 D (mm) Nominal Diameter		320	320	340
公称结构高度 H (mm) Nominal Unit Spacing		170	170	195
公称爬电距离 (mm) Nominal Creepage Distance		560	560	560
连接标记 (mm) Coupling Size		20	20	24
锁紧销型式 Locking Device		R	R	R
正极性直流耐受电压 (kV) Positive DC Withstand Voltage	干 Dry	140	140	140
	湿 Wet	55	55	50
冲击击穿电压 Impulse Puncture Voltage (p.u.)		2.85~3.19	2.85~3.19	2.85~3.19
雷电全波冲击干耐受电压 (kV) Dry Lightning Impulse Withstand Voltage		140	140	140
SF6 击穿耐受电压 (kV) SF6 Puncture Withstand Voltage		+210	+210	+210
质量 (kg) Mass		13.7	15.2	16.5